


Model 2783_25_D




Examples


X=444, Y=158, Z=16, D=4, H=4, OL=0, OR=5, OT=5, OB=5, TX=0, TY=0, TS=1, TR=0, GE=0, CSL=0.4;0.4, KLR=23, KLU=20

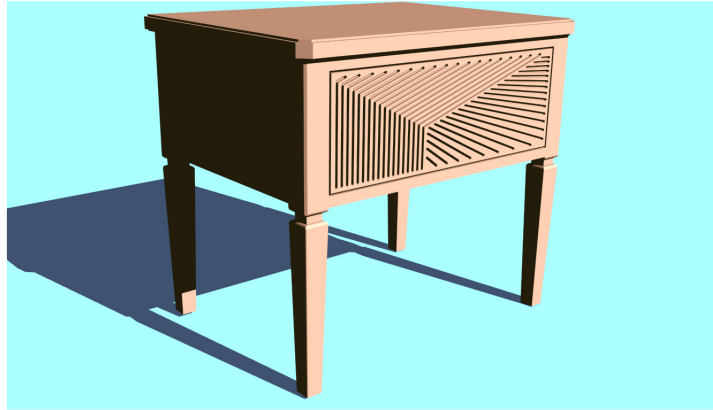

CSL=0.18;0.21, KLR=22, KLU=11, other parameters are the same

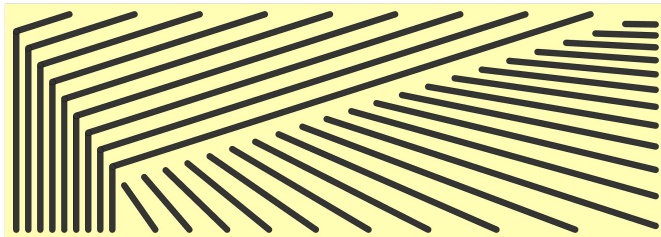

TX=-130, TY=-55, TS=3.5, CSL=0.4;0.4, KLR=61, KLU=66, other parameters are the same

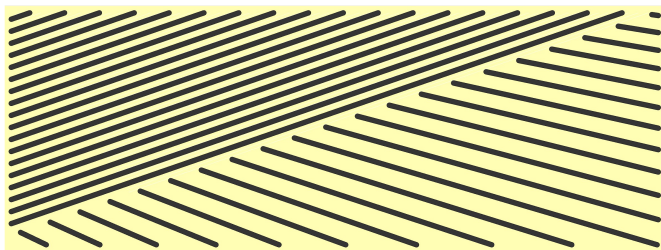

TX=1730, TY=-140, TS=6.5, CSL=0.19;0.22, KLR=68, KLU=50, other parameters are the same

Parameters

Main

Name	Code	Unit
Overall dimension X	X	mm
Overall dimension Y	Y	mm
Overall dimension Z	Z	mm
Pattern width	D	mm
Pattern depth	H	mm
Number of lines right	KLR	-
Number of lines top	KLU	-
Line bend center (X,Y) (0.0 – 1.0) ; (0.0 – 1.0)	CSL	-

Pattern offset from edge:

Name	Code	Unit
left	OL	mm
right	OR	mm
top	OT	mm
bottom	OB	mm

Pattern adjustment:

Name	Code	Unit
Shift X	TX	mm
Shift Y	TY	mm
Pattern scale	TS	-
Pattern rotation	TR	deg
Remove geometry less than	GE	mm

