


Model 2784_25_D




Examples


X=444, Y=158, Z=16, D=4, H=4, OL=11, OR=0, OT=5, OB=5, TX=0, TY=0, TS=1, TR=0, GE=0, CSL=0.5;0.45, KLU=21, KLD=16, VA=0

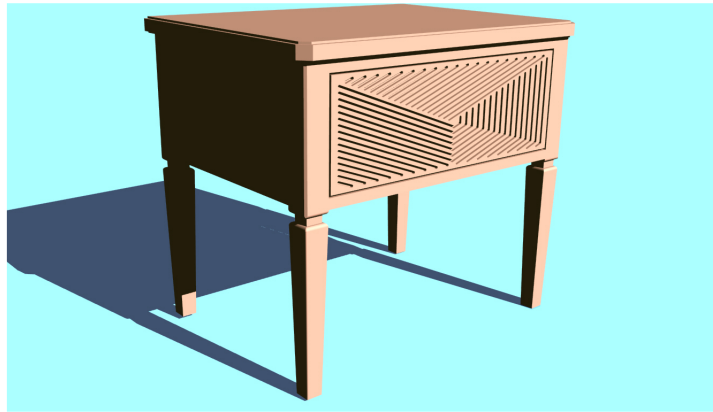

VA=1, other parameters are the same

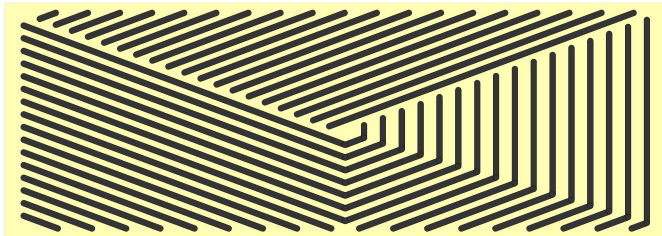

(OL, OR, OT, OB)=5, D=5, H=5, TX=-162, TY=-10, TS=3.84, TR=139, GE=0, CSL=0.55;0.27, KLU=55, KLD=48, VA=0

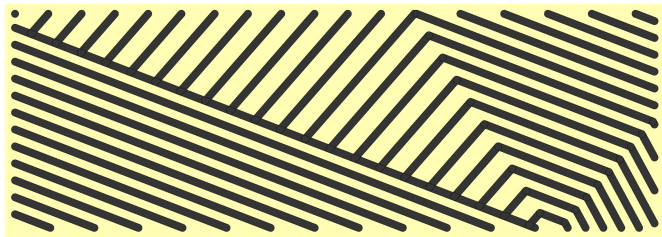

(OL, OR, OT, OB)=5, D=4, H=4, TX=-133, TY=-16, TS=2.2, TR=160, GE=0, CSL=0.55;0.27, KLU=37, KLD=30, VA=1



Parameters

Main

Name	Code	Unit
Overall dimension X	X	mm
Overall dimension Y	Y	mm
Overall dimension Z	Z	mm
Pattern width	D	mm
Pattern depth	H	mm
Number of lines bottom	KLD	-
Number of lines top	KLU	-
Line bend center (X,Y) (0.0 – 1.0) ; (0.0 – 1.0)	CSL	-

Pattern offset from edge:

Name	Code	Unit
left	OL	mm
right	OR	mm
top	OT	mm
bottom	OB	mm

Pattern adjustment:

Name	Code	Unit
Shift X	TX	mm
Shift Y	TY	mm
Pattern scale	TS	-
Pattern rotation	TR	deg
Remove geometry less than	GE	mm

Pattern variant VA:

Name	Code	Unit
With outline	0	-

(OL, OR, OT, OB)=5, D=4, H=4, TX=100, TY=-268, TS=5, TR=180,
GE=0, CSL=0.45;0.31, KLD=72

